

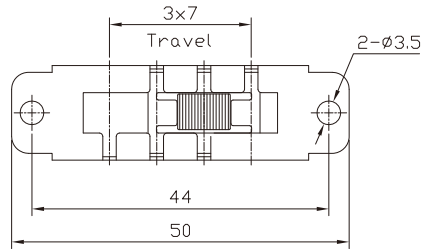



XN-1-2416-KLT

- Single/Double Pole; Single/Double Throw
- Ratings:
16A 125VAC; 8A 250VAC; UL
8A 250VAC; TUV, CQC
- Features:
Knob, Terminal & Casing Options see
selections guide

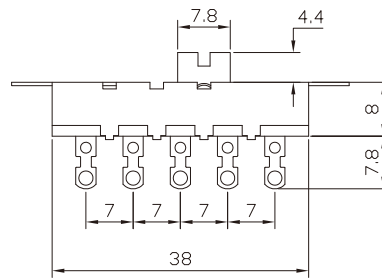


Circuit Diagram




XN-1-2416-XXX

Double Pole ———— Housing Code
 4 Position ———— Terminal Code
 Current at 125VAC ———— Actuator Code

Actuator Options

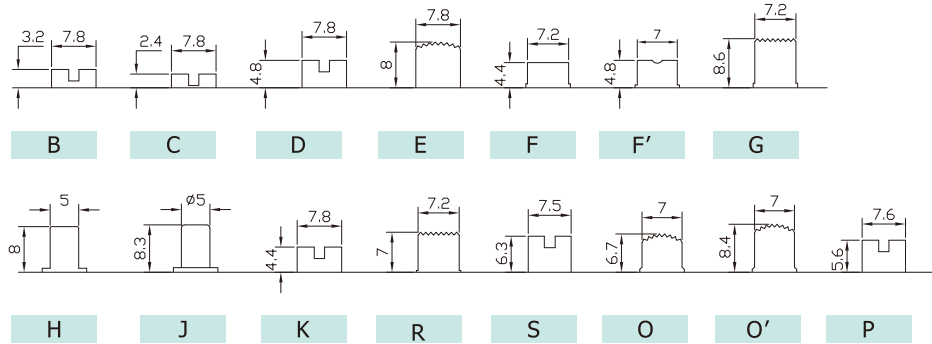

Terminal Options

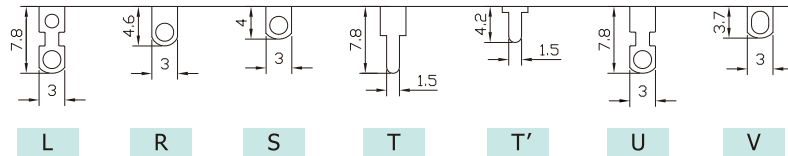

Housing Options

